
WIRING TVRO - Quattro Antenna



Cable type:

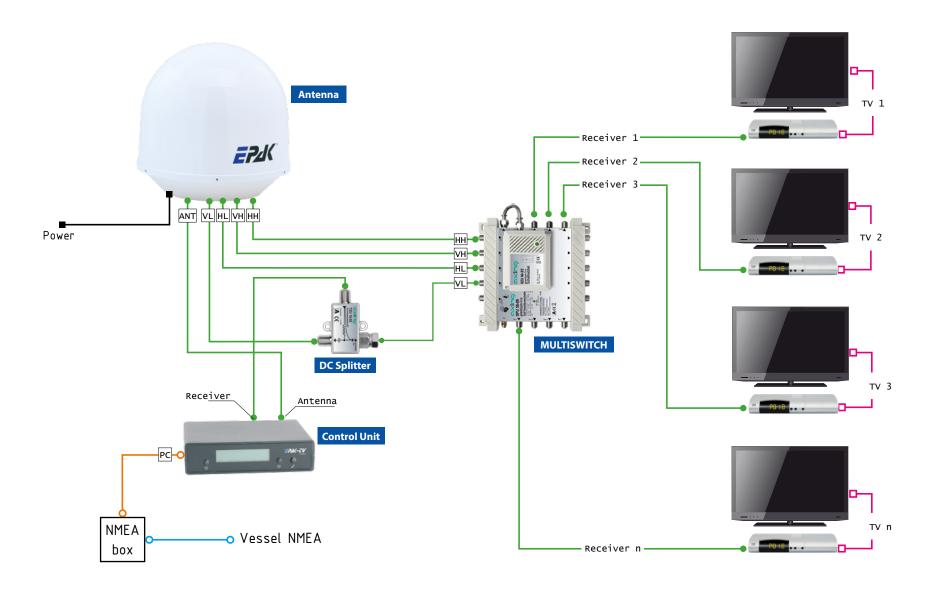

RG6 - double shielded satellite coaxial cable (75 Ohm) with F-plug at both ends

AV cable (HDMI or SCART) for television commissioning

Interconnecting cable (provided along with the NMEA Box)



Power supply control unit: RS422/RS232 (Twisted wire or 9 Pin Sub-D)

Standard power cable - min. 2x 1.5 sqmm

Mount a DC splitter in the VL path after the multi switch and connect CU via an RG6 cable